

Synchronization of the cardiac pacemaker model with delayed pulse-coupling

Marat Akhmet

Department of Mathematics, Middle East Technical University, 06531 Ankara, Turkey

Abstract

We consider the integrate-and-fire model of the cardiac pacemaker with delayed pulsatile coupling. Sufficient conditions of synchronization are obtained for identical and non-identical oscillators.

Keywords: Cardiac pacemaker model; Identical oscillators; Non-identical oscillators; Firing in unison; Delayed pulse-coupling; Discontinuous dynamics; Fixed points.

1. Introduction

In paper [1] C. Peskin proposed a model of cardiac pacemaker, where signal of fire arises not from an outside stimuli, but in the population of cells itself. Well known conjectures of self-synchronization were formulated. Solution of these conjectures for identical oscillators [1, 2] stimulated intensive investigations [3]-[11].

Delays arise naturally in many biological models [12]. In particular, they were considered in firefly models [13] as delay between stimulus and response, and in continuously coupled neuronal oscillators [14]. Authors of [4] considered the phenomenon for the Mirolo and Strogatz analysis, [2]. Identical oscillators were investigated. Two oscillators dynamics is discussed mathematically, and the multi-oscillatory system by computer simulations. It was found that the excitatory model of two units “can get only out-of-phase synchronization since in-phase synchronization proved to be not stable.” In paper [5] a model without leakage was discussed, that is, oscillators increase at a constant rate between moments of firing. It was found that a periodic solution is reached after a finite time. Consequently, research of integrate-and-fire models, which admit delays and fire in unison is still on the agenda.

In paper [15] we have introduced a new method of investigation of biological oscillators. The method seems to be universal to analyze quite identical integrate-and-fire oscillators. In the present article we extend it to the Peskin’s model with delayed interaction. Conditions are found, which guarantee synchronization of the model. Our system is different than that in [4], since we suppose that the pulse-coupling is instantaneous, if oscillators are close to each and are near threshold. In next our papers, we plan to consider other models, varying types of the delay involvement, as well as inhibitory models such that analogues of results in [4] and [16] can be obtained. The method of analysis of non-identical oscillators is based on results of theory of differential equations with discontinuities at non-fixed moments [17]-[27].

2. The couple of identical oscillators

Let us start to analyze two identical oscillators, which satisfy, if they do not fire, the following differential equations

$$x_i' = S - \gamma x_i, \quad (2.1)$$

where $0 \leq x_i \leq 1, i = 1, 2$. It is assumed that S, γ are positive numbers and $\kappa = \frac{S}{\gamma} > 1$.

When $x_j(t) = 1$, then the oscillator fires, $x_j(t+) = 0$. The firing changes value of the another oscillator, x_i , such that

$$x_i(t+) = 0, \text{ if } x_i(t) \geq 1 - \epsilon, \quad (2.2)$$

and

$$x_i(t + \tau+) = x_i(t + \tau) + \epsilon, \text{ if } x_i(t) < 1 - \epsilon. \quad (2.3)$$

We have that

$$x_i(s) = x_i(t)e^{-\gamma(s-t)} + \int_t^s e^{-\gamma(s-u)} S du$$

near t .

In what follows, assume that

$$\frac{\kappa - 1}{\kappa - 1 + \epsilon} < e^{-\gamma\tau}. \quad (2.4)$$

Then, from

$$\|x_i(s)\| \leq \|x_i(t)\|e^{-\gamma(s-t)} + \int_t^s e^{-\gamma(s-u)} S du \leq$$

$$(1 - \epsilon)e^{-\gamma\tau} + \kappa(1 - e^{-\gamma\tau}),$$

and $x_i(t) < 1 - \epsilon$, we obtain that $x_i(s) < 1$, for all $s \in [t, t + \tau]$. In other words oscillator x_i does not achieve the threshold within interval $[t, t + \tau]$, if the distance of $x_i(t)$ to threshold is more than ϵ . This is important for the construction of the prototype map, and makes a sense of condition (2.3).

One must emphasize that couplings of units are not only delayed in our model. By (2.2) oscillators interact instantaneously, if they are near threshold. This assumption is natural as firing provokes another oscillator, which being close to

Email address: marat@metu.edu.tr (Marat Akhmet)

threshold “is ready” to react instantaneously. Otherwise, the interaction is retarded.

Next, we shall construct the prototype map. Fix a moment $t = \zeta$, when x_1 fires, and suppose that oscillators are not synchronized. In interval $[\zeta, \zeta + \tau]$ oscillator x_2 moves by law $x_2(t) = x_2(\zeta)e^{-\gamma(t-\zeta)} + \int_{\zeta}^t e^{-\gamma(t-u)} S du$, and

$$x_2(\zeta + \tau) = [x_2(\zeta) - \kappa]e^{-\gamma\tau} + \kappa. \quad (2.5)$$

Denote $t = \eta$, the firing moment of x_2 , then

$$x_2(\eta) = [x_2(\zeta + \tau) + \epsilon]e^{-\gamma(\eta-\zeta-\tau)} + \kappa[1 - e^{-\gamma(\eta-\zeta-\tau)}].$$

The equation $x_2(\eta) = 1$ implies that

$$e^{-\gamma(\eta-\zeta)} = \frac{1 - \kappa}{x_2(\zeta) - \kappa + \epsilon_1}, \quad (2.6)$$

where $\epsilon_1 = \epsilon e^{\gamma\tau}$. Since $x_1(\eta) = \kappa[1 - e^{-\gamma(\eta-\zeta)}]$, we have that

$$x_1(\eta) = \kappa \frac{1 - (x_2(\zeta) + \epsilon_1)}{\kappa - (x_2(\zeta) + \epsilon_1)}. \quad (2.7)$$

Introduce the following map

$$L_D(v, \epsilon) = \kappa \frac{1 - (v + \epsilon_1)}{\kappa - (v + \epsilon_1)}, \quad (2.8)$$

such that $x_1(\eta) = L_D(x_2(\zeta), \epsilon)$. If $t = \xi$ is the next to η firing moment of x_2 , then one can similarly find that $x_2(\xi) = L_D(x_1(\eta), \epsilon)$. One can see that the map L_D can be useful for our investigation, since it evaluates alternatively the sequence of values x_1 and x_2 at firing moments.

Take $\tau > 0$ so small that

$$e^{-\gamma\tau} > \epsilon. \quad (2.9)$$

From (2.9) it implies that $\epsilon_1 < 1$.

One can evaluate that

$$L_D(1 - \epsilon_1, \epsilon) = 0.$$

and the derivatives of the map in $(0, 1 - \epsilon_1)$ satisfy

$$L'_D(v, \epsilon) = \kappa \frac{1 - \kappa}{(\kappa - (v + \epsilon_1))^2} < 0, \quad (2.10)$$

and

$$L''_D(v, \epsilon) = 2\kappa \frac{1 - \kappa}{(\kappa - (v + \epsilon_1))^3} < 0 \quad (2.11)$$

We can easily find that there is a fixed point of the map,

$$v^* = (\kappa - \frac{\epsilon_1}{2}) - \sqrt{\kappa^2 - \kappa + \frac{\epsilon_1^2}{4}}, \quad (2.12)$$

and

$$L'_D(v^*, \epsilon) < -1. \quad (2.13)$$

That is, fixed point v^* is a repellor.

Now, we will define an extension of L_D on $[0, 1]$ in the following way. Let

$$\omega = \kappa \frac{1 - \epsilon_1}{\kappa - \epsilon_1}. \quad (2.14)$$

One can see that $1 - \epsilon < \omega < 1$, if

$$e^{\gamma\tau} < \frac{\kappa}{\kappa - 1 + \epsilon}. \quad (2.15)$$

In what follows, we assume that ϵ is sufficiently small such that (2.4) implies (2.15). We set $L_D(0, \epsilon) = \omega$, and define $L_D(v, \epsilon) = 0$, if $1 - \epsilon_1 \leq v \leq 1$. Since $L_D : [0, 1] \rightarrow [0, 1]$ is a monotonic continuous function and $[0, 1]$ is an invariant set of this map, it is convenient for analysis by using iterations. The graph of this map is seen in Figure 1. To emphasize a significance of

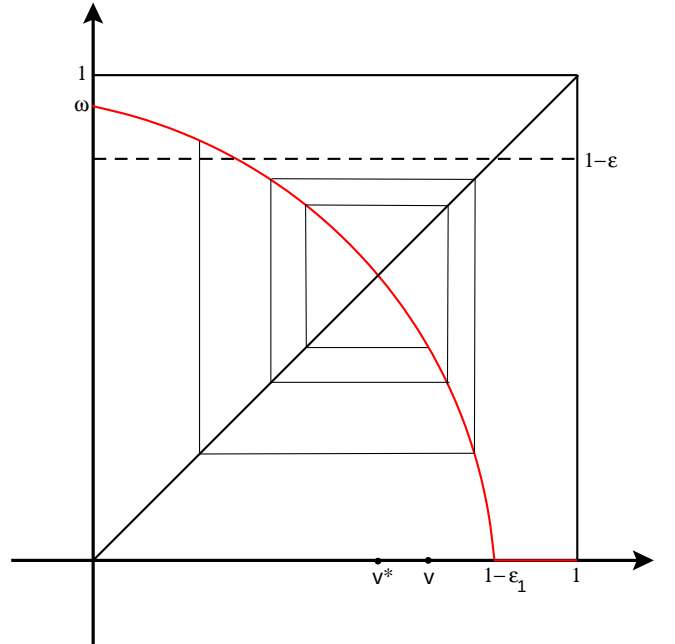


Figure 1: The graph of map L_D in red, fixed point v^* , and stabilized trajectory are seen.

this map for the present analysis, let us see how iterations of it can help to observe the synchronization. Fix $t_0 \geq 0$, a firing moment, $x_1(t_0) = 1, x_1(t_0+) = 0$. While the couple x_1, x_2 , does not synchronize, there exists a sequence of moments $t_0 < t_1 < \dots$ such that x_1 fires at t_i with even i and x_2 with odd indices. Denote $u_i = x_1(t_i)$, if i is odd, and $u_i = x_2(t_i)$, if i is even. One can easily see that $u_{i+1} = L_D(u_i, \epsilon), i \geq 0$. The pair synchronizes if and only if there exists $j \geq 1$ such that $x_1(t) \neq x_2(t)$, if $t \leq t_j$, and $x_1(t) = x_2(t)$, for $t > t_j$. In particular, both oscillators have to fire at t_j . That is, inequalities $1 - \epsilon \leq u_{j-1} < 1$ are valid. It is possible if $0 \leq u_{j-2} \leq L_D^{-1}(1 - \epsilon)$. In particular, we have that $L_D(0) = \omega$ satisfies this condition. In the same time, if $1 - \epsilon_1 \leq u_{j-3} \leq 1$, then $u_{j-2} = 0 = L_D(u_{j-3})$ and $1 - \epsilon < u_{j-1} = \omega < 1$ again. That is, we have found that if there exists an integer $k \geq 0$ such that $1 - \epsilon \leq L_D^k(v) \leq 1$, then the motion $(x_1(t), x_2(t))$ with $x_1(t_0+) = v, x_2(t_0+) = 0$, synchronizes at the k -th firing moment. Conversely, if a motion $(x_1(t), x_2(t))$

synchronizes, then one can find a firing moment, t_0 , such that $x_1(t_0+) = 0$, $x_2(t_0+) = v$, $v \in [0, 1]$, and a number k such that $1 - \epsilon \leq L_D^k(v) \leq 1$.

Thus, the last discussion confirms that the analysis of synchronization is consistent fully with the dynamics of the introduced map $L_D(v, \epsilon)$ on $[0, 1]$, and the map L_D can be applied as the main instrument of the paper. That is why, we use this function as a prototype map in our investigations.

Now, by applying properties of L_D , and analyzing self-compositions of the map, one can easily obtain that for all $k \geq 0$ functions L_D^k have only one fixed point, v^* , and $|(L_D^k(v^*, \epsilon))'| > 1$. We skip the discussion as it is respectively simple, and request a large place. Since all the maps L_D^k have one and the same fixed point, v^* , there is not a k -periodic motion, $k > 1$, of the map. Consequently, for arbitrary point $v \neq v^*$ one has a stabilized trajectory present in Figure 1. The couple synchronizes when $L_D^k(v, \epsilon) \geq 1 - \epsilon_1$.

Next, we investigate the rate of synchronization. Set $a_0 = L_D^{-1}(\omega) = 0$, $a_{k+1} = L_D^{-1}(a_k)$, $k = 0, 1, 2, \dots$ (See Figure 2).

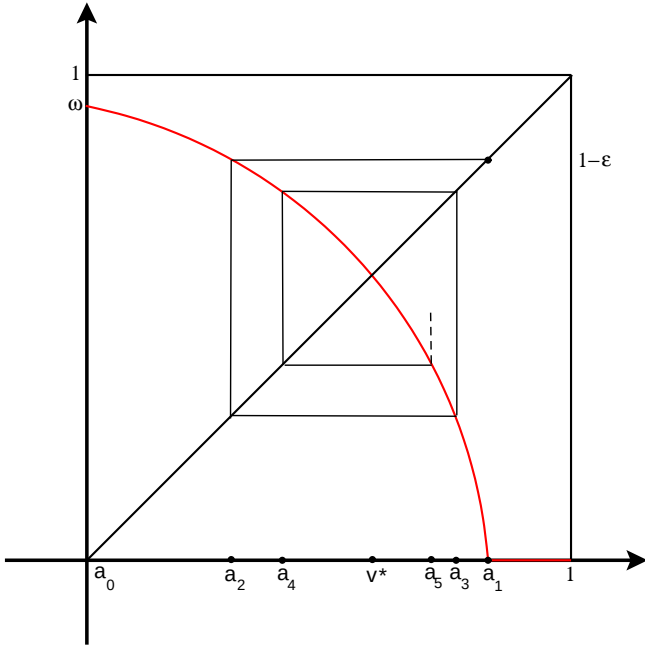


Figure 2: Boundaries, a_i , of rate intervals are seen.

Denote by S_k the region of $[0, 1]$, which points v are synchronized after exactly k -iterations of the map L_D . One can see that $S_0 = [1 - \epsilon_1, 1]$, $S_1 = [a_0, a_2]$ and $S_k = (a_{k-1}, a_{k+1}]$, if $k \geq 3$, is an odd positive integer, and $S_k = [a_{k+1}, a_{k-1})$, if $k \geq 2$, is an even positive integer. One can see that $a_k \rightarrow v^*$ as $k \rightarrow \infty$. We shall call S_k , $k \geq 0$, the rate intervals.

From the discussion has been made above it follows that there is no a finite time such that all points of the unite square synchronize. The closer v is to the equilibrium v^* the later is the moment of synchronization.

Set $T = \frac{1}{\gamma} \ln \frac{\kappa}{\kappa-1}$ and denote by $\tilde{T}$ the time needed for solution $u(t, 0, v^*)$ of the equation $u' = S - \gamma u$, to achieve threshold. Since all oscillators fire within an interval of length T and the distance between two firing moments of an oscillator are not

less than $\tilde{T}$, we can conclude that the following theorem is correct.

Theorem 2.1. Assume that (2.4) and (2.9) are valid. If $t_0 \geq 0$ is a firing moment, $x_1(t_0) = 1$, $x_1(t_0+) = 0$, and $x_2(t_0+) \in S_m$ for some natural number m , then the couple x_1, x_2 of continuously coupled identical biological oscillators synchronizes within the time interval $[t_0 + \frac{m}{2}\tilde{T}, t_0 + Tm]$.

3. Non-identical oscillators: the general case.

To make our investigation closer to the real world problems one has to consider an ensemble of non-identical oscillators. We will discuss the following system of equations

$$\dot{x}_i = (S + \mu_i) - (\gamma + \zeta_i)x_i, \quad (3.16)$$

where $0 \leq x_i \leq 1 + \xi_i$, $i = 1, 2, \dots, n$. The constants S and γ are the same as in the last section such that $\kappa = \frac{S}{\gamma} > 1$. Moreover, constants μ_i and ζ_i are sufficiently small for $\kappa_i = \frac{S + \mu_i}{\gamma + \zeta_i} > 1$. When $x_j(t) = 1 + \xi_j$ then the oscillator fires, $x_j(t+) = 0$. The firing changes values of other oscillators x_i , $i \neq j$, such that

$$x_i(t+) = 0, \text{ if } x_i(t) \geq 1 - \epsilon \quad (3.17)$$

and, if $x_i(t) < 1 - \epsilon$, then

$$x_i(t + \tau+) = x_i(t + \tau) + \epsilon + \epsilon_i. \quad (3.18)$$

In what follows, we call real numbers $\epsilon, \mu_i, \zeta_i, \xi_i, \epsilon_i$, parameters, assuming the first one is positive. Moreover, constants $\mu_i, \zeta_i, \xi_i, \epsilon_i$ will be called parameters of perturbation. Assume that they are zeros to obtain the model of identical oscillators. We have that an exhibitory model is under discussion, that is $\epsilon + \epsilon_i > 0$ for all i . Coupling is all-to-all such that each firing elicits jumps in all non-firing oscillators. If several oscillators fire simultaneously, then other oscillators react as it just one oscillator fires. In other words, any firing acts only as a signal which abruptly provokes a state change, the intensity of the signal is not important, and pulse strengths are not additive. We have that

$$x_i(s) = x_i(t)e^{-(\gamma + \zeta_i)(s-t)} + \int_t^s e^{-(\gamma + \zeta_i)(s-u)}(S + \mu_i)du \quad (3.19)$$

near t .

If one assume that condition (2.4) is valid, and constants μ_i and ζ_i are sufficiently small such that

$$\frac{\kappa_i - 1}{\kappa_i - 1 + \epsilon} < e^{-(\gamma + \zeta_i)\tau}, \quad (3.20)$$

then $x_i(s) < 1$ for all $s \in [t, t + \tau]$, if $x(t) < 1 - \epsilon$.

In this section we begin with analysis of a couple of oscillators of the ensemble of n oscillators, and find that the couple synchronizes if parameters close to zero. Then synchronization of the ensemble will be proved.

Consider the model of n non-identical oscillators given by relations (2.1) and (2.3). Fix two of them, let say, x_l, x_r .

Lemma 3.1. Assume that conditions (2.4) and (2.9) are valid, $t_0 \geq 0$ is a firing moment such that $x_l(t_0) = 1 + \xi_l$, $x_l(t_0+) = 0$. If parameters are sufficiently close to zero, and absolute values of parameters of perturbation are sufficiently small with respect to ϵ , then the couple x_l, x_r synchronizes within the time interval $[t_0, t_0 + T]$ if $x_r(t_0+) \notin [a_0, a_1]$ and within the time interval $[t_0 + \frac{m-1}{2}\tilde{T}, t_0 + (m+1)T]$, if $x_r(t_0+) \in S_m, m \geq 1$.

Proof. If $1 + \xi_r - \epsilon - \epsilon_r \leq x_r(t_0) \leq 1 + \xi_r$, then two oscillators fire simultaneously, and we have only to prove the persistence of the synchrony, that will be discussed later. So, fix another oscillator $x_r(t)$ such that $0 \leq x_r(t_0) < 1 + \xi_r - \epsilon - \epsilon_r$. While the couple is not synchronized, there is a sequence of firing moments, t_i , such that $0 \leq t_0 < t_2 < \dots$, and oscillator x_l fires at t_i , with i even, and x_r fires at t_i with odd i . For the sake of brevity let $u_i = x_l(t_i), i = 2j + 1, u_i = x_r(t_i), i = 2j, j \geq 0$. In what follows we shall show how to evaluate u_{i+1} through $L(u_i)$. Consider i is even. There are $k \leq n - 2$ distinct firing moments of the motion $x(t)$ in the interval (t_i, t_{i+1}) . Denote by $t_i < \theta_1 < \theta_2 < \dots < \theta_k < t_{i+1}$, the moments of firing, when at least one of the coordinates of $x(t)$ fires. We have that

$$\begin{aligned} x_r(\theta_1 + \tau) &= (x_r(t_i + \tau) + \epsilon + \epsilon_r)e^{-(\gamma + \zeta_r)(\theta_1 + \tau - t_i)} + \\ &\quad \kappa_r(1 - e^{-(\gamma + \zeta_r)(\theta_1 + \tau - t_i)}), \\ x_r(\theta_2 + \tau) &= (x_r(\theta_1 + \tau) + \epsilon + \epsilon_r)e^{-(\gamma + \zeta_r)(\theta_2 - \theta_1)} + \\ &\quad \kappa_r(1 - e^{-(\gamma + \zeta_r)(\theta_2 - \theta_1)}), \\ &\dots\dots\dots \\ x_r(\theta_j + \tau) &= (x_r(\theta_{j-1} + \tau) + \epsilon + \epsilon_r)e^{-(\gamma + \zeta_r)(\theta_j - \theta_{j-1})} + \\ &\quad \kappa_r(1 - e^{-(\gamma + \zeta_r)(\theta_j - \theta_{j-1})}), \\ &\dots\dots\dots \\ x_r(t_{i+1}) &= (x_r(\theta_k + \tau) + \epsilon + \epsilon_r)e^{-(\gamma + \zeta_r)(t_{i+1} - \theta_k - \tau)} + \\ &\quad \kappa_r(1 - e^{-(\gamma + \zeta_r)(t_{i+1} - \theta_k - \tau)}). \end{aligned} \quad (3.21)$$

The moment t_{i+1} satisfies

$$1 + \xi_r - \epsilon - \epsilon_r \leq x_r(t_{i+1}) \leq 1 + \xi_r, \quad (3.22)$$

and continuously depends on parameters and $x_r(t_i)$.

We have also that

$$\begin{aligned} x_l(\theta_1 + \tau) &= \kappa_l(1 - e^{-(\gamma + \zeta_l)(\theta_1 + \tau - t_i)}), \\ x_l(\theta_2 + \tau) &= (x_l(\theta_1 + \tau) + \epsilon + \epsilon_l)e^{-(\gamma + \zeta_l)(\theta_2 - \theta_1)} + \\ &\quad \kappa_l(1 - e^{-(\gamma + \zeta_l)(\theta_2 - \theta_1)}), \\ &\dots\dots\dots \\ x_l(\theta_j + \tau) &= (x_l(\theta_{j-1} + \tau) + \epsilon + \epsilon_l)e^{-(\gamma + \zeta_l)(\theta_j - \theta_{j-1})} + \\ &\quad \kappa_l(1 - e^{-(\gamma + \zeta_l)(\theta_j - \theta_{j-1})}), \\ &\dots\dots\dots \\ x_l(t_{i+1}) &= (x_l(\theta_k + \tau) + \epsilon + \epsilon_l)e^{-(\gamma + \zeta_l)(t_{i+1} - \theta_k - \tau)} + \\ &\quad \kappa_l(1 - e^{-(\gamma + \zeta_l)(t_{i+1} - \theta_k - \tau)}). \end{aligned} \quad (3.23)$$

The last two formulas describe the dependence of u_{i+1} on u_i . One can easily find that similar dependence can be found if i is odd.

Set $\delta_i(\mu_i, \zeta_i) = \kappa_i - \kappa$. One can see that $\delta_i(0, 0) = 0$. Use (3.21) and (3.23) to obtain

$$\begin{aligned} x_r(t_{i+1}) &= (x_r(t_i + \tau) + \epsilon)e^{-\gamma(t_{i+1} - t_i)}e^{-\zeta_r(t_{i+1} - t_i)} + \\ &\quad \kappa(1 - e^{-(\gamma + \zeta_r)(t_{i+1} - t_i)}) + \epsilon_r e^{-\gamma(t_{i+1} - t_i)}e^{-\zeta_r(t_{i+1} - t_i)} + \\ &\quad (\epsilon + \epsilon_r) \sum_{j=1}^k e^{-(\gamma + \zeta_r)(t_{i+1} - \theta_j - \tau)} + \delta_r(1 - e^{-(\gamma + \zeta_r)(t_{i+1} - t_i)}), \end{aligned} \quad (3.24)$$

and

$$\begin{aligned} x_l(t_{i+1}) &= (\kappa + \delta_l)(1 - e^{-(\gamma + \zeta_l)(t_{i+1} - t_i)}) + \\ &\quad (\epsilon + \epsilon_l) \sum_{j=1}^k e^{-(\gamma + \zeta_l)(t_{i+1} - \theta_j - \tau)}. \end{aligned} \quad (3.25)$$

Now, recall map L_D defined in the last section. We have

$$\begin{aligned} \phi(\bar{t}_{i+1}) &= (x_r(t_i + \tau) + \epsilon)e^{-\gamma(\bar{t}_{i+1} - t_i - \tau)} + \\ &\quad \kappa(1 - e^{-\gamma(\bar{t}_{i+1} - t_i)}), \end{aligned} \quad (3.26)$$

where $\bar{t}_{i+1}$ satisfies

$$\phi(\bar{t}_{i+1}) = 1, \quad (3.27)$$

and

$$\psi(\bar{t}_{i+1}) = \kappa(1 - e^{-\gamma(\bar{t}_{i+1} - t_i)}). \quad (3.28)$$

By applying the definition of L_D one can see that $L_D(u_i) = \psi(\bar{t}_{i+1})$.

Assume, without loss of generality, that $\bar{t}_{i+1} \leq t_{i+1}$. Then one has that

$$\begin{aligned} \phi(\bar{t}_{i+1}) - x_r(\bar{t}_{i+1}) &= 1 - x_r(\bar{t}_{i+1}) = \\ &= \Phi_1(\epsilon, \epsilon_r, \zeta_r, \delta_r, \tau), \end{aligned} \quad (3.29)$$

where

$$\begin{aligned} \Phi_1(\epsilon, \epsilon_r, \zeta_r, \delta_r, \tau) &= [\kappa(1 - e^{-\gamma(\bar{t}_{i+1} - t_i)}) - \\ &\quad (x_r(t_i + \tau) + \epsilon)e^{-\gamma(\bar{t}_{i+1} - t_i)}](e^{-\zeta_r(\bar{t}_{i+1} - t_i)} - 1) - \epsilon_r e^{-\gamma(\bar{t}_{i+1} - t_i)}e^{-\zeta_r(\bar{t}_{i+1} - t_i)} - \\ &\quad (\epsilon + \epsilon_r) \sum_{j=1}^k e^{-(\gamma + \zeta_r)(\bar{t}_{i+1} - \theta_j - \tau)} - \delta_r(1 - e^{-(\gamma + \zeta_r)(\bar{t}_{i+1} - t_i)}), \end{aligned}$$

and the last expression tends to zero as all of its arguments tend to zero. Next, by utilizing (3.22) and (3.29) we have that $t_{i+1} - \bar{t}_{i+1} \leq \Phi_2(\epsilon, \epsilon_r, \zeta_r, \delta_r)$, where

$$\Phi_2(\epsilon, \epsilon_r, \zeta_r, \delta_r, \tau) \equiv \frac{|\zeta_r| + \epsilon + |\epsilon_r| + \Phi_1(\epsilon, \epsilon_r, \zeta_r, \delta_r, \tau)}{S - |\mu_r| - \gamma - |\zeta_r|}.$$

Now, by applying the last inequality, (3.25) and (3.28) one can see that

$$\begin{aligned} |L_D(u_i) - K_i(u_i)| &= |x_l(t_{i+1}) - \psi(\bar{t}_{i+1})| \leq |x_l(t_{i+1}) - x_l(\bar{t}_{i+1})| + \\ &\quad |x_l(\bar{t}_{i+1}) - \psi(\bar{t}_{i+1})| \leq \Phi_2(S + |\mu_l| + \gamma + |\zeta_l|) + \Phi_1. \end{aligned}$$

That is, difference $L_D(u_i, \epsilon) - u_{i+1}$ can be made arbitrarily small if the parameters are sufficiently close to zero. Moreover, we should assume smallness of absolute values of the parameters

of perturbation with respect to ϵ , to satisfy (3.22). This convergence is uniform with respect to u_0 . We can also vary the number of points θ_i and their location in the intervals (t_j, t_{j+1}) between 0 and $n-1$. The convergence is indifferent with respect to these variations, too.

Consider $L_D^i(u_0, \epsilon)$. It is true that $L_D^m(u_0, \epsilon) \in [1 - \epsilon, 1]$. Assume, without loss of generality, that m is an even number. Since L_D is a continuous function, we can find recurrently, by applying the following sequence of inequalities $|u_i - L_D^i(u_0, \epsilon)| \leq |u_i - L_D(u_{i-1}, \epsilon)| + |L_D(u_{i-1}, \epsilon) - L_D(L_D^{i-1}(u_0, \epsilon))|$, $i = 1, 2, \dots$, that either $1 + \xi_r - \epsilon - \epsilon_r < u_m < 1 + \xi_r$ or $1 + \xi_l - \epsilon - \epsilon_l < u_{m+1} < 1 + \xi_l$, if the parameters are sufficiently small. From the notation it implies that each of the last two inequalities bring the couple to synchronization.

Since each of the iterations of L_D is done within interval with length not more than T , we obtain now that the couple x_l, x_r is synchronized not later than $t = t_0 + (m + 1)T$.

We have found that oscillators x_l and x_r fire in unison at some moment $t = \theta$. Next, we show that they will save the state, being different. To find conditions for this, let us denote by $\tau > \theta$ the next moment of firing of the couple. Let say, x_r fires at this moment. Thus, we have that $x_l(\theta+) = x_r(\theta+) = 0$. Then $x_l(t) = x_r(t)$, $\theta \leq t \leq \tau$. It is clear that to satisfy $x_l(\tau+) = x_r(\tau+) = 0$, we need $1 + \xi_r - \epsilon - \epsilon_r \leq x_l(\tau)$. By applying formula (3.22) again, this time with $t_i = \theta$, $t_{i+1} = \tau$, one can easily obtain that the inequality is correct if parameters are close to zero and absolute values of the parameters of perturbation are small with respect to ϵ . Thus, one can conclude that if a couple of oscillators is synchronized at some moment of time than it continues to fire in unison for ever. The lemma is proved.

Let us extend the result of the last Lemma for the whole ensemble.

Theorem 3.1. Assume that (2.4) and (2.9) are valid, $t_0 \geq 0$ is a firing moment such that $x_j(t_0) = 1 + \xi_j$, $x_j(t_0+) = 0$. If the parameters are sufficiently close to zero, and absolute values of parameters of perturbation are sufficiently small with respect to ϵ , then the motion $x(t)$ of the system synchronizes within the time interval $[t_0, t_0 + T]$, if $x_i(t_0+) \notin [a_0, a_1]$, $i \neq j$, and within the time interval $[t_0 + \frac{\max_{i \neq j} k_i - 1}{2} \tilde{T}, t_0 + (\max_{i \neq j} k_i + 1)T]$, if there exist $x_s(t_0+) \in [a_0, a_1]$ for some $s \neq j$ and $x_i(t_0+) \in S_{k_i}$, $i \neq j$.

Proof. Consider the collection of couples (x_i, x_j) , $i \neq j$. Each of these pairs synchronizes by the last Lemma within interval $[t_0 + \frac{\max_{i \neq j} k_i - 1}{2} \tilde{T}, t_0 + (\max_{i \neq j} k_i + 1)T]$. The theorem is proved.

Let us introduce a more general system of oscillators such that Theorem 3.1 is still true.

Consider a system of n oscillators given such that if i -th oscillator does not fire or jump up, it satisfies i -th equation of system (2.1). If several oscillators x_{i_s} , $s = 1, 2, \dots, k$, fire such that $x_{i_s}(t) = 1 + \phi(t, x(t), x(t - \tau_{i_s}))$, where $|\phi(t, x(t), x(t - \tau_i))| < \xi_i$, $i = 1, 2, \dots, n$, and $x_{i_s}(t+) = 0$, then all other oscillators x_{i_p} , $p = k + 1, k + 1, \dots, n$, change their coordinates by law

$$x_i(t+) = 0, \text{ if } x_i(t) \geq 1 - \epsilon \quad (3.30)$$

and, if $x_i(t) < 1 - \epsilon$, then

$$x_i(t + \tau+) = x_i(t + \tau) + \epsilon + \sum_{s=1}^k \epsilon_{i_p i_s}. \quad (3.31)$$

One can easily see that the last theorem is correct for the model just have been described, if $\epsilon + \sum_{s=1}^k \epsilon_{i_p i_s} > 0$, for all possible k, i_p and i_s , and we assume that ϵ_{ij} are also parameters of perturbation. Moreover, one can easily see that initial functions for thresholds conditions can be chosen arbitrarily with values in the domain of the system.

Remark 3.1. Our preliminary analysis shows that the dynamics in a neighborhood of v^* can be very complex. We do not exclude that a chaos appearance can be observed, and trajectories may belong to a fractal, if parameters are not small. It does not contradict the zero Lebesgue measure of non-synchronized points. Possibly, analysis of non-identical oscillators with not small parameters is of significant interests to explore arrhythmias, earthquakes, chaotic flashing of fireflies, etc.

Remark 3.2. The time of synchronization for a given initial point does not increase if number of oscillators increases (but the parameters needed to be closer to zero). This property, possibly, can be accepted as a small-world phenomenon.

4. The simulation result

To demonstrate our main result numerically, let us consider a model of 100 oscillators, which initial values are randomly uniform distributed in $[0, 1]$. Their differential equations are of form

$$x'_i = (4.1 + 0.01 * \text{sort}(\text{rand}(1, n)) - (3.2 + 0.01 * \text{sort}(\text{rand}(1, n))))x_i,$$

and thresholds

$$1 + 0.005 * \text{sort}(\text{rand}(1, n)), i = 1, 2, \dots, 100,$$

where deviations of coefficients the threshold are also uniformly random in $[0, 1]$. We place the result of simulation with $\epsilon = 0.06$ and $\tau = 0.002$ in Figure 3, where the state of the system is shown at the initial moment, before the 183-th jump, before the 366-th jump and the last is before the 549-th jump. That is, it is obvious that eventually all oscillators fire in unison.

5. Conclusion

The cardiac pacemaker model of identical and non-identical oscillators with delayed pulse-couplings is investigated in the paper. We apply the method of investigation proposed in [15], which is based on a specially defined map. The map is, in fact a Poincaré map if one considers the identity of oscillators. Sufficient conditions are found such that delay involvement in the Peskin's model does not change the synchronization result for identical and non-identical oscillators [1, 2, 15]. The result has

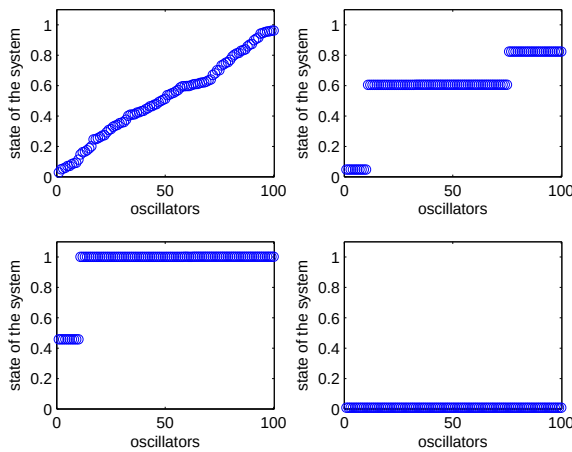


Figure 3: The state of the model before the first, the 183-th, 366-th, and 549-th jump is seen. The flat fragments of the graph are groups of oscillators firing in unison.

a biological sense, since retardation is often presents in biological processes and if one proves that a phenomenon preserves even with delays, that makes us more confident that the model is adequate to the reality. Moreover, the method of treatment of models with delay can be useful for neural networks and earthquake faults [4, 5, 29, 30, 31] analysis. All proved assertions can be easily specified with $\tau = 0$, to obtain synchronization of the Peskin's model for identical [1, 2] and nonidentical [15] oscillators. In particular, from the theorem of Section 2 one can obtain the result of Example 2.2 of [15].

References

- [1] C.S. Peskin, Mathematical aspects of heart physiology, Courant Institute of mathematical sciences, (1975), pp. 268-278.
- [2] R.E. Mirollo, S.H. Strogatz, Synchronization of pulse-coupled biological oscillators, SIAM J. Appl. Math., 50 (1990), pp. 1645-1662.
- [3] S. Bottani, Pulse-coupled relaxation oscillators: From biological synchronization to self-organized criticality, Phys. Rev. Lett., 74 (1995), pp. 4189-4182.
- [4] U. Ernst, K. Pawelzik, T. Geisel, Delay-induced multistable synchronization of biological oscillators, Phys. Rev. E, 57 (1998), pp. 2150-2162.
- [5] W. Gerstner, Rapid phase locking in systems of pulse-coupled oscillators with delays, Phys. Rev. Lett., 76 (1996), pp. 1755-1758.
- [6] Y. Kuramoto, Collective synchronization of pulse-coupled oscillators and excitable units, Phys. D, 50 (1991), pp. 15-30.
- [7] R. Mathar, J. Mattfeldt, Pulse-coupled decentral synchronization, SIAM J. Appl. Math., 56 (1996), pp. 1094-1106.
- [8] W. Senn, R. Urbanzik, Similar non-leaky integrate-and-fire neurons with instantaneous couplings always synchronize, SIAM J. Appl. Math., 61 (2000), pp. 1143-1155.
- [9] S. Strogatz, Sync: The Emerging Science of Spontaneous Order, Hyperion, New York, 2003.
- [10] M. Timme, F. Wolf, and T. Geisel, Prevalence of Unstable Attractors in Networks of Pulse-Coupled Oscillators, Phys. Rev. Lett., 89 (2002) 154105.
- [11] M. Timme, F. Wolf, The simplest problem in the collective dynamics of neural networks: is synchrony stable? Nonlinearity, 21 (2008), pp. 15791599.
- [12] J.D. Murray, Mathematical Biology: I. An Introduction, Springer, New-York, 2002.
- [13] J. Buck, Synchronous Rhythmic Flashing of Fireflies. II., Quart. Rev. Biol., 63 (1988), pp. 265-290.

- [14] T.-W. Ko, G.B. Ermentrout, Effects of axonal time delay on synchronization and wave formation in sparsely coupled neuronal oscillators, Phys. Rev. E, 76 (2007), pp. 1-8.
- [15] M.U. Akhmet, Analysis of biological integrate-and-fire oscillators, arXiv:1011.5632. (submitted).
- [16] C. van Vreeswijk, Partial synchronization in populations of pulse-coupled oscillators, Phys. Rev. E, 54 (1996), pp. 5522-5537.
- [17] M.U. Akhmet, Principles of discontinuous dynamical systems, Springer, New York, 2010.
- [18] M.U. Akhmet, Perturbations and Hopf bifurcation of the planar discontinuous dynamical system, Nonlinear Analysis: TMA, 60 (2005) 163-178.
- [19] J. Devi, Vasundara, A. S. Vatsala, Generalized quasilinearization for an impulsive differential equation with variable moments of impulse, Dynam. Systems Appl., 12 (2003) 369-382.
- [20] Feckan, M., Bifurcation of periodic and chaotic solutions in discontinuous systems. Arch. Math. (Brno), 34 (1998) 73-82.
- [21] M. Frigon, D. O'Regan, Impulsive differential equations with variable times, Nonlinear Analysis: TMA, 26 (1996) 1913-1922.
- [22] V. Lakshmikantham, D. D. Bainov, P. S. Simeonov, Theory of Impulsive Differential Equations, World Scientific, Singapore, NJ, London, Hong Kong, 1989.
- [23] V. Lakshmikantham, S. Leela, S. Kaul, Comparison principle for impulsive differential equations with variable times and stability theory, Nonlinear Analysis: TMA, 22 (1994) 499-503.
- [24] V. Lakshmikantham and X. Liu, On quasistability for impulsive differential equations, Nonlinear Analysis: TMA, 13 (1989) 819-828.
- [25] X. Liu, R. Pirapakaran, Global stability results for impulsive differential equations, Appl. Anal., 33 (1989) 87-102.
- [26] A. C. J. Luo, Global transversality, resonance and chaotic dynamics, World Scientific, Hackensack, NJ, 2008.
- [27] A. M. Samoilenko, N. A. Perestyuk, Impulsive Differential Equations, World Scientific, Singapore, 1995.
- [28] Y. Kuramoto, Chemical oscillators, Waves and Turbulence, Springer, Berlin, 1984.
- [29] A.V.M. Herz, J.J. Hopfield, Earthquake cycles and neural perturbations: collective oscillations in systems with pulse-coupled thresholds elements, Phys. Rev. Lett., 75 (1995), pp. 1222-1225.
- [30] J.J. Hopfield, Neurons, dynamics and computation, Physics today, February, (1994), pp. 40-46.
- [31] Z. Olami, H.J.S. Feder, K. Christensen, Self-organized criticality in a continuous, nonconservative cellular automaton modeling earthquakes, Phys. Rev. Lett., 68 (1992), pp. 1244-1247.